




DOUBLE PITCH CHAINS

According to ČSN 02 3315, DIN 8181 and ISO 1275

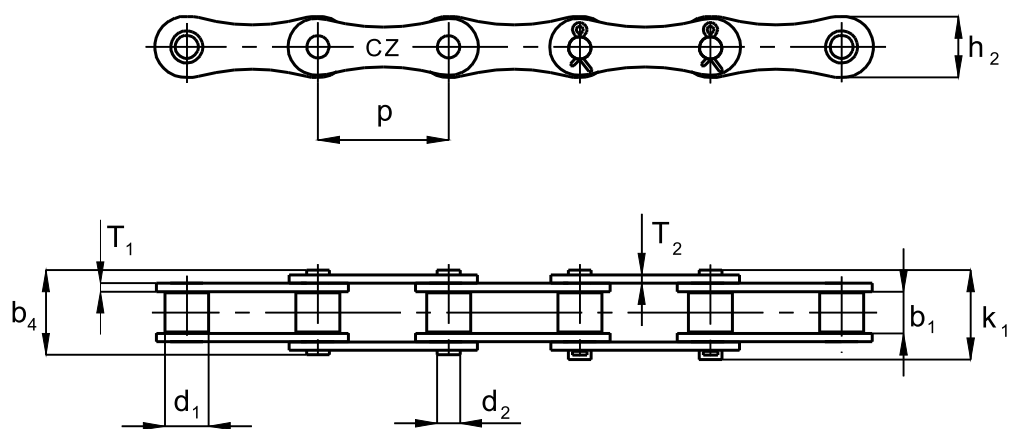

ISO DIN CSN	PITCH	INSIDE WIDTH	ROLLER DIAMETER	PIN DIAMETER	PIN LENGHT	CONNECT. PIN LENGHT	INNER PLATE WIDTH	INNER PLATE THICKNESS	OUTER PLATE THICKNESS	BEARING AREA	WEIGHT	BREAKING LOAD	CONNECTING ELEMENTS				
	p	b1 min.	d1 max.	d2 max.	b4 max.	k1 max.	h2 max.	T1	T2	S	q	FB min.	B	A	S	L	C
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm ²	kg/m	N					
TYPE B (European design)																	
208 B	25,40	7,75	8,51	4,45	16,40	19,40	12,00	1,60	1,50	50,28	0,48	18 690	
210 B	31,75	9,65	10,16	5,08	18,70	21,50	14,40	1,60	1,60	67,30	0,60	23 310	
212 B	38,10	11,68	12,07	5,72	22,30	24,50	16,40	1,80	1,80	89,35	0,76	30 345
TYPE A (American design)																	
208 A	25,40	7,85	7,95	3,96	16,40	19,00	12,00	1,50	1,50	44,23	0,62	17 500	.	.	.		
210 A	31,75	9,53	10,16	5,08	20,10	22,90	14,40	2,00	2,00	70,10	0,70	27 200	.	.	.		
212 A	38,10	12,70	11,91	5,94	25,40	28,30	16,40	2,40	2,40	105,40	0,98	31 380	.	.	.		

CONNECTING ELEMENTS

