


SIMPLEX ROLLER CHAINS WITH EXTENDED SHOULDERED PINS

ČZ Standard

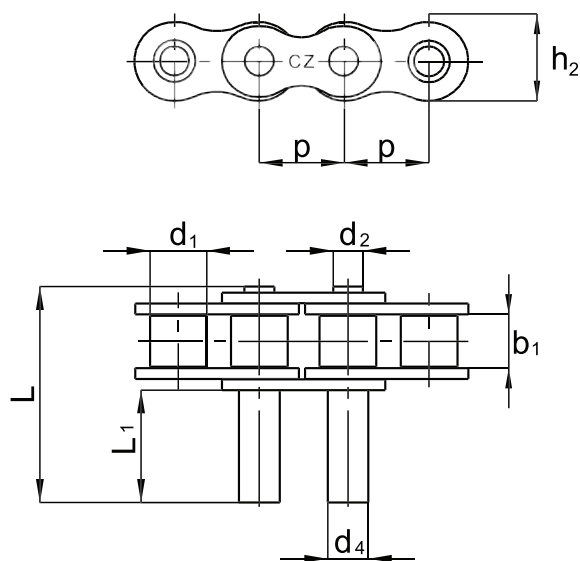

TRADE MARK ČZ	PITCH	INSIDE WIDTH	ROLLER DIAMETER	PIN DIAMETER	SHOULDER DIAMETER	PIN LENGTH	PIN EXTENSION	INNER PLATE WIDTH
	p	b1 min.	d1 max.	d2 max.	d4	L max.	L1 max.	h2 max.
	mm	mm	mm	mm	mm	mm	mm	mm
06 B-1*	9,525	5,72	6,35	3,28	4,55	28,00	16,50	8,20
06 B-1*	9,525	5,72	6,35	3,28	5,08	26,60	15,00	8,20
06 B-1*	9,525	5,72	6,35	3,28	5,08	31,50	20,00	8,20
081	12,7	3,30	7,75	3,66	4,44	22,20	13,50	9,90
081	12,7	3,30	7,75	3,66	4,45	25,50	16,50	9,90
081	12,7	3,30	7,75	3,66	4,55	31,30	22,30	9,90
081	12,7	3,30	7,75	3,66	5,00	24,00	15,00	9,90
081	12,7	3,30	7,75	3,66	5,00	33,00	24,00	9,90
081	12,7	3,30	7,75	3,66	5,17	24,00	15,00	9,90
081	12,7	3,30	7,75	3,66	5,17	31,00	22,00	9,90
410	12,7	3,30	7,75	3,66	5,00	33,00	24,00	9,90
1/2"x3/16" MOFA	12,7	4,88	7,75	4,18	5,00	35,60	23,50	10,90
08 B-1	12,7	7,75	8,51	4,45	3,90	25,60	10,00	11,80
08 B-1	12,7	7,75	8,51	4,45	4,90	21,55	5,00	11,80
08 B-1	12,7	7,75	8,51	4,45	5,00	50,55	35,00	11,80
08 B-1	12,7	7,75	8,51	4,45	5,17	31,80	15,00	11,80


*Only with straight plates

SIMPLEX ROLLER CHAINS WITH EXTENDED SHOULDERED PINS

ČZ Standard


TRADE MARK ČZ	PITCH	INSIDE WIDTH	ROLLER DIAMETER	PIN DIAMETER	SHOULDER DIAMETER	PIN LENGHT	PIN EXTENSION	INNER PLATE WIDTH
	p	b1 min.	d1 max.	d2 max.	d4	L max.	L1 max.	h2 max.
	mm	mm	mm	mm	mm	mm	mm	mm
08 B-1	12,7	7,75	8,51	4,45	6,00	31,05	15,50	11,80
08 B-1	12,7	7,75	8,51	4,45	6,06	23,55	8,00	11,80
08 B-1	12,7	7,75	8,51	4,45	6,06	30,90	15,30	11,80
08 B-1	12,7	7,75	8,51	4,45	6,06	35,55	20,00	11,80
08 B-1	12,7	7,75	8,51	4,45	6,06	37,10	21,60	11,80
08 B-1	12,7	7,75	8,51	4,45	8,00	35,55	20,00	11,80
428	12,7	7,75	8,51	4,45	5,17	31,80	15,00	12,00
10 B-1	15,875	9,65	10,16	5,08	5,50	35,30	17,50	14,50
10 B-1	15,875	9,65	10,16	5,08	5,50	37,80	20,00	14,50
10 B-1	15,875	9,65	10,16	5,08	6,06	33,85	16,00	14,50
10 B-1	15,875	9,65	10,16	5,08	6,06	68,80	51,00	14,50
10 B-1	15,875	9,65	10,16	5,08	6,60	37,80	20,00	14,50
10 B-1	15,875	9,65	10,16	5,08	8,00	37,70	20,00	14,50
10 B-1	15,875	9,65	10,16	5,08	8,00	44,80	27,00	14,50
10 B-1	15,875	9,65	10,16	5,08	8,00	57,80	40,00	14,50
10 B-1	15,875	9,65	10,16	5,08	10,00	32,80	15,00	14,50
10 B-1	15,875	9,65	10,16	5,08	10,00	43,00	25,20	14,50
12 B-1	19,05	11,68	12,07	5,72	5,90	33,20	12,20	16,10
12 B-1	19,05	11,68	12,07	5,72	6,90	80,30	40,00	16,10
12 B-1	19,05	11,68	12,07	5,72	7,00	41,00	20,00	16,10
12 B-1	19,05	11,68	12,07	5,72	7,00	47,00	26,00	16,10
12 B-1	19,05	11,68	12,07	5,72	7,00	51,00	30,00	16,10
12 B-1	19,05	11,68	12,07	5,72	7,00	52,70	31,70	16,10
12 B-1	19,05	11,68	12,07	5,72	8,00	47,00	26,00	16,10
12 B-1	19,05	11,68	12,07	5,72	8,00	56,00	35,00	16,10
12 B-1	19,05	11,68	12,07	5,72	8,00	61,40	40,40	16,10
12 B-1	19,05	11,68	12,07	5,72	10,00	41,00	20,00	16,10
12 B-1	19,05	11,68	12,07	5,72	10,27	41,00	20,00	16,10
16 B-1	25,4	17,02	15,88	8,28	6,00	67,30	33,60	21,00
16 B-1	25,4	17,02	15,88	8,28	9,00	67,30	33,60	21,00
16 B-1	25,4	17,02	15,88	8,28	10,00	63,80	30,00	21,00
208 B	25,4	7,75	8,51	4,45	6,06	30,90	15,30	12,00
212 B	38,1	11,68	12,07	5,72	7,00	47,00	26,00	16,40

The position of extended shouldered pins must be consulted with the producer

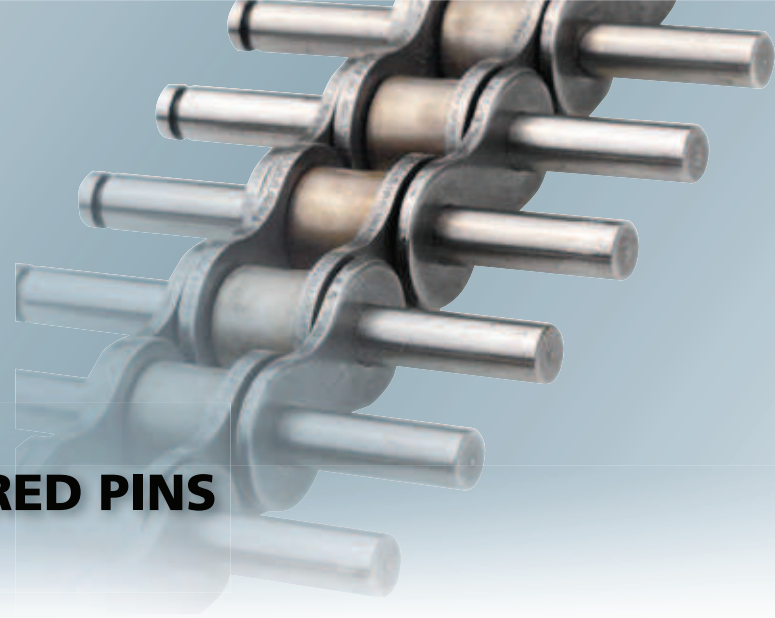

DUPLEX ROLLER CHAINS WITH EXTENDED SHOULDERED PINS

ČZ Standard

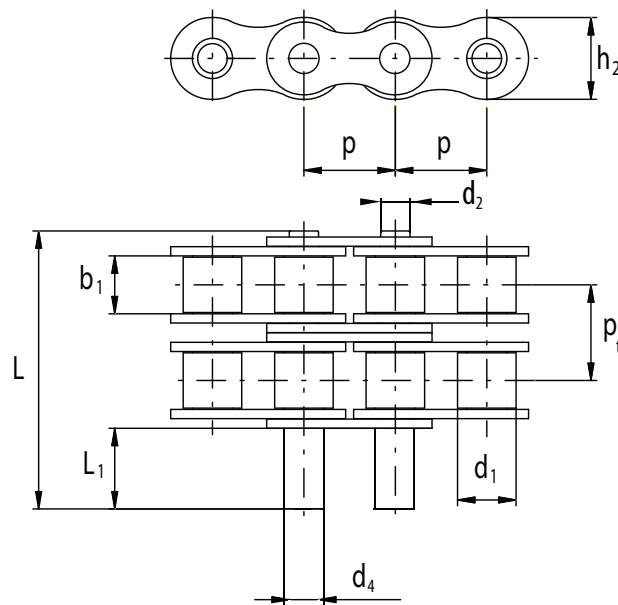


TRADE MARK ČZ	PITCH	INSIDE WIDTH	ROLLER DIAMETER	PIN DIAMETER	SHOULDER DIAMETER	PIN LENGHT	PIN EXTENSION	INNER PLATE WIDTH
	p	b1 min.	d1 max.	d2 max.	d4	L max.	L1 max.	h2 max.
	mm	mm	mm	mm	mm	mm	mm	mm
10 B-2	15,875	9,65	10,16	5,08	6,06	49,30	15,00	14,50
16 B-2	25,4	17,02	15,88	8,28	12,00	85,60	19,90	21,00

The position of extended shouldered pins must be consulted with the producer

SPECIAL EXTENDED PINS

ČZ Standard

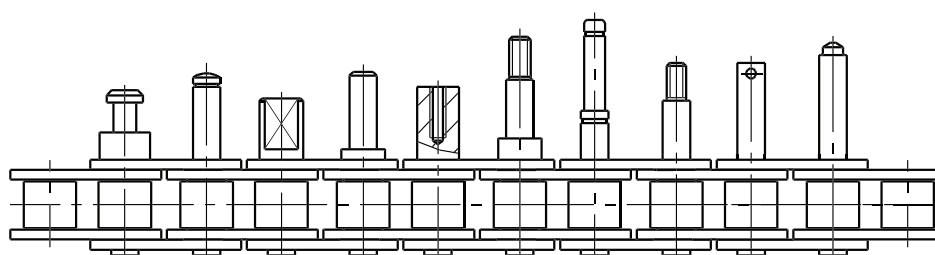

Most of roller and bush chains in single and multiple row modification can be equipped with extended pins according to individual customer request - see picture above.

The pins can be equipped with grooves for the adjusting plate or adjusting ring, they can also have a holes for cotter, outer and inner thread, spots, or they can be multiple shouldered. Dimensions of these special pins, their position and also the basic chain modification must be consulted with producer.